


PLAN VIEW

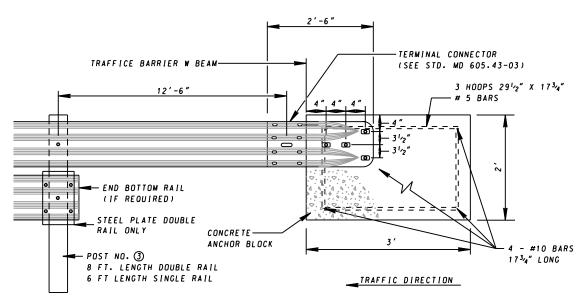

FRONT VIEW

NOTES

- 1. THE CONTRACTOR SHALL FURNISH AND INSTALL FOUR (4) $^78''$ DIA X 10" LENGTH HEAVY DUTY GALV. THREADED ANCHOR RODS WITH HEX HEAD RECESSED NUTS AND RECTANGULAR PLATE WASHERS. ANCHOR RODS SHALL BE ANCHORED WITH EPOXY GROUT AS SPECIFIED IN SPEC. 902.
- 2. THIS OPTION REPLACES POSTS 1 AND 2 AS SHOWN IN OPTION 1
- 3. CONCRETE ANCHOR BLOCK MAY BE PRECAST OR CAST IN PLACE.
- 4. THE COST OF THE TERMINAL CONNECTOR SHALL BE INCIDENTAL TO THE CONTRACT PRICE PER EACH FOR THE TYPE A END ANCHORAGE TERMINAL.

SPECIFICATION 605	CATEGORY CODE ITEMS		Maryland Department of Transportation
APPROVED Kik G. M. COLLECTION DIRECTOR - OFFICE OF HIGHWAY DEVELOPMENT			STATE HIGHWAY ADMINISTRATION STANDARDS FOR HIGHWAYS AND INCIDENTAL STRUCTURES TRAFFIC BARRIER W BEAM WITH
StateHighway	APPROVAL • SHA REVISIONS	APPROVAL • FEDERAL HIGHWAY ADMINISTRATION	
	APPROVAL 11-10-99 REVISED 9-30-04	APPROVAL 7-2-99 REVISED 3-28-01	
	REVISED	REVISED	
	REVISED	REVISED	